

# AOS01 + BLOCK




## ANCHOR POINT WITH BALLAST FOR FLAT ROOFS

### WITHOUT PERFORATIONS

It is designed for installation on flat roofs, and does not require to drill the roof covering, avoiding thermal bridges and preserving the waterproofing layer of the structure.

### FLAT ROOFS


Designed for flat roofs with inclines up to 5° with PVC or bituminous final covering, with or without gravel.



LOAD DIRECTION





TYPES OF APPLICATION

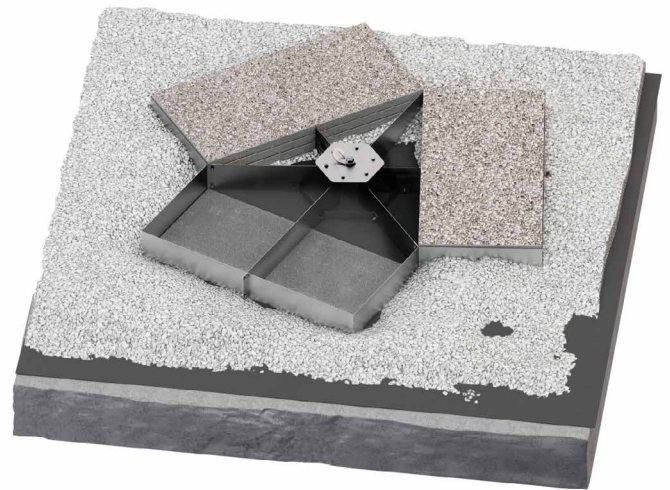

## BLOCK | CODES AND DIMENSIONS



CODE	material	B [mm]	H [mm]	L [mm]	pcs
BLOCK	AISI 304 stainless steel grade 1.4301	1870	165	1645	1
AOS01	AISI 304 stainless steel grade 1.4301	60	-	98	1

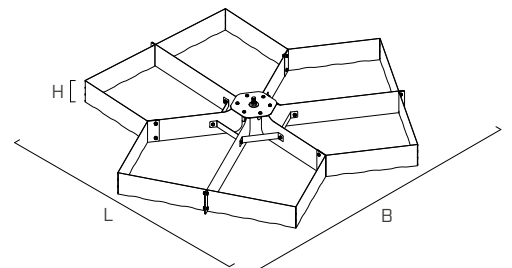

\* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a calculation report with minimum distances according to the relevant standard requirements, the substructure must be checked by a qualified engineer before installation.

### COMPLEMENTARY PRODUCTS

CODE	description	B [mm]	L [mm]	s [mm]	pcs
BLOCKMAT	BLOCKMAT mats not included in the supply of the BLOCK item (3 pieces per BLOCK are required) it can be ordered separately.	550	1050	6	1

